

High-performance, high-precision and efficient

Highly productive

The PET-Line is designed for continuous operation in preform production. All axes move at the maximum possible speed.

They reliably produce your preforms in excellent quality and with high availability.

Energy efficient

Optimised axes and recovery of braking energy make the PET-Line the most economical preform system on the market.

You save energy costs and reduce your company's ecological footprint.

Sustainable


We want PET to stay in the cycle. That's why we have developed plasticising with a new screw for PET and recycled PET.

You benefit from a large process window as well as low AA values and a low IV drop.



Symbol image (series)

Product comparison

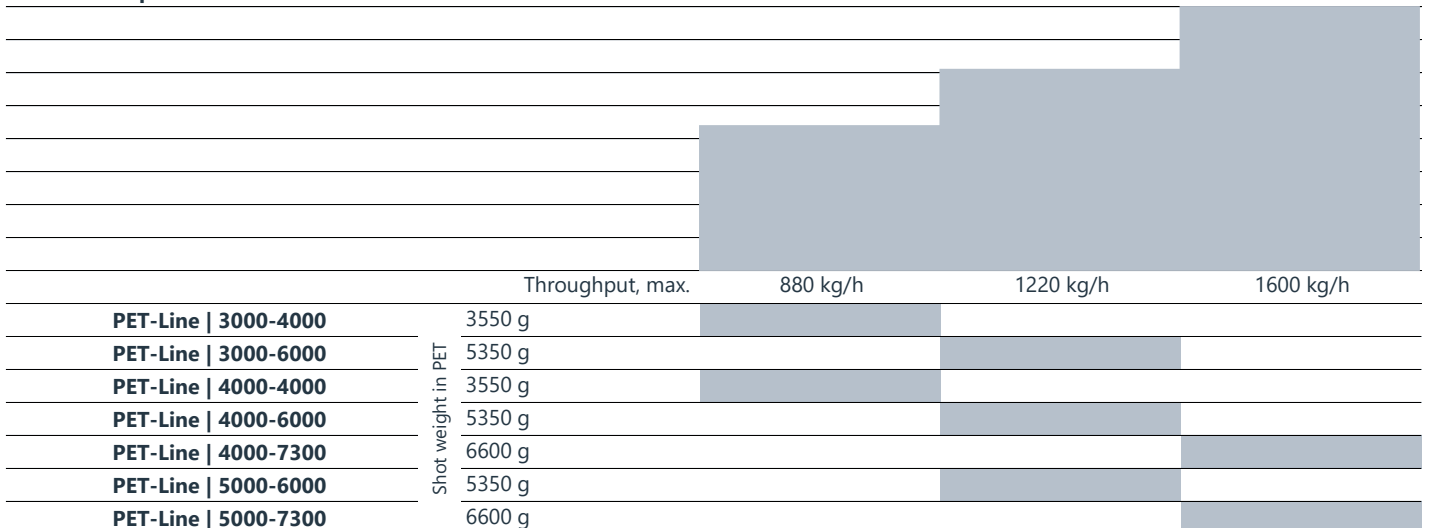

PET-Line | 3000-4000

Clamping unit		3000
Clamping force	kN	3000
Distance between tiebars (h x v)	mm	785 x 785
Tie bar diameter	mm	115
Opening stroke	mm	480
Mould height, min. - max.	mm	555 - 1055
Mould weight, max.	⁴⁾ kg	5800
Mould fastening bolts		M24
Mould weight moving side max.	⁴⁾ kg	2000
Ejector stroke	mm	175
Ejector force	kN	80
"High Force" ejector force /stroke	kN/ mm	608 / 20
Lock-to-Lock Time	¹⁾ s	~ 1.9

Injection Unit		4000
Screw diameter	mm	110
Nozzle diameter	mm	32 / 38
Nozzle contact surface radius	mm	38 / 45
Injection piston diameter	mm	110
Injection pressure	¹⁾ bar	1240
Shot weight, max.	³⁾ g	3550
Throughput, max.	³⁾ kg/h	880

Electrical Connection		CE	UL
Power supply 1 / 2	V	400 / -	400 / 480
Frequency 1 / 2	Hz	50 / -	60 / 60
Main power cross section 1	mm ²	3P+N+PE 2x70	3P+N+PE 2x50
Main power cross section 2	mm ²	-	3P+PE 2x50
Main power 1 / 2	kW	280 / -	115 / 165
Protection class, IEC 60529 / UL50		IP54 / Typ 3	IP54 / Typ 3

General	<u>Layout</u>	
Weight Injection side	t	12.90
Weight clamping side (without mould)	t	14.75
Weight post cooling and housing	t	3.70
Take-out gripper load, max.	kg	190
Total length	m	10.25
Total width	m	4.14
Total height	m	3.01
Oil filling	l	620
Oil quality	⁶⁾	HLP 46, DIN 51524-2

Cooling Circuit 1: Mould / Take-out		
Inlet temperature	°C	8
Inlet pressure, max.	bar	6.5
Pressure drop, min.	bar	5
Flow rate, max.	⁵⁾ m ³ /h	75 - 80
Flange connection		2 x DN 50, 2 x 2"

Cooling Circuit 2: Machine		
Inlet temperature, max.	²⁾ °C	30 / 35
Inlet pressure	bar	5 - 6
Pressure drop, min.	bar	2
Flow rate, max.	m ³ /h	6 / 13.2
Female thread	inch	G 1 1/4

Compressed Air		
Inlet pressure	bar	8 - 10
Flow rate, max.	¹⁾ Nm ³ /h	75 - 90
Hose connection	inch	1

¹⁾ depending on preform, mould & process

²⁾ with Option "Water inlet temperature warm"

³⁾ PET with IV 0.8

⁴⁾ heavier mould weights on request

⁵⁾ depending on mould

⁶⁾ zinc-free

TS-PPF 302 Ver.7.1

Subject to technical alterations